


IP DOME PERFORMANCE LINE 2 MP WITH POE

NEXT GEN PerformanceLine

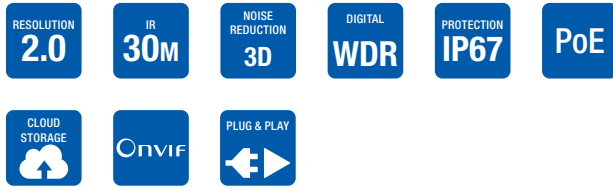

FEATURES

- Full HD resolution with CMOS sensor
- Video compression H.264+/H.264/MJPEG
- IR illumination up to 30 meters
- 2.8 mm fixed lens
- OSD menu, AGC, BLC, Digital WDR, 3D-DNR
- Mirror, ROI, motion detection, privacy mask
- IP67
- 3AXIS: wall and ceiling installation
- PoE supported
- Plug&Play connection with NEXTGEN NVR
- Compatible with DDNS DEMES

SOFTWARE AND APPS


- HYUVMS and HYUCONNECT for Android and iOS
- HYU VMS client software
- Cloud P2P service: hyucloud.hyundai-security.es



ACCESSORIES



DIMENSIONS

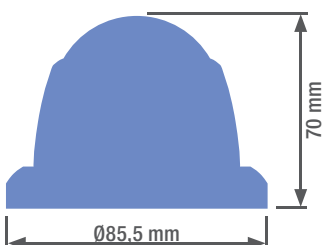

CAMERA

Image sensor	1/2.8" CMOS, 2MP	
Effective pixels	1920(H) x 1080(V)	
Resolution	Stream 1	1080P, 1,3MP, 720P (25/30 fps)
	Stream 2	704x576 (25 fps), 704x480 (30 fps), 640x480 (25/30 fps), 352x288 (25 fps), 352x240 (30 fps), 320x240 (25/30 fps)
Electronic shutter	1/3s ~ 1/100.000s	
IR illumination	30 meters	
Minimum illumination	0,01 lux F1.2 (AGC On) / 0 lux IR ON	

LENS

Lens	2,8 mm
Viewing angle	95°
Aperture	F2.0

FUNCTIONS

Day/night	Auto (ICR), programmed
OSD menu	Supported
Backlight compensation	BLC (configurable area), Digital WDR
Noise reduction	3D-DNR
ROI	1 fixed zone
Motion detection	Supported
Privacy mask	Supported
Image adjustment	Brightness, saturation, contrast, sharpness, mirror

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC (±25%)
Consumption	4W (Max. 6W PoE)
PoE	802.3 af
Working temperature	-30°C ~ +60°C
RH	≤95% (without condensation)
Protection	IP67

PHYSICAL FEATURES

Case	PVC & metal
Dimensions	Ø85,5 x 70 mm
Weight	350 g