


4 IN 1 DOME PRO SERIES, 2 MP

CVBS HDCVI™

HDTVI AHD

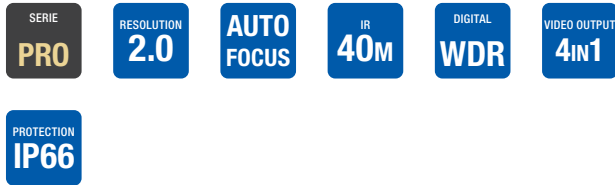

## FEATURES


- Full HD resolution with Lowlight CMOS sensor
- IR illumination up to 40 meters
- Black tempered glass to improve IR transfer
- 2.8~12 mm autofocus motorized lens
- Improved autofocus with synchronous focus (each zoom step is focused)
- Transmission distance up to 300 meters
- AWB, AGC, 2D-NR, Digital WDR
- OSD menu
- 4 in 1 output (DIP switch): CVBS, HDCVI, HDTVI, AHD
- IP66
- 3AXIS: wall and ceiling installation

## ACCESSORIES



HYU-251  
Connection base

## DIMENSIONS

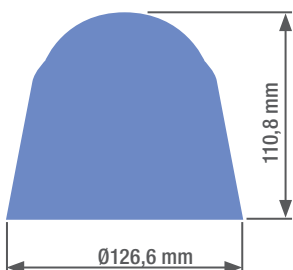

### CAMERA

Image sensor	1/2,7 Lowlight CMOS, 2,4 MP
Effective pixels	1920(H) x 1080(V)
Synchronization	Internal
Frames per second	PAL/NTSC: 25/30 fps @1080P
IR illumination	3 led array: 40 meters
Minimum illumination	0 lux IR ON
Video output	AHD, HDCVI, HDTVI, 1 BNC CVBS (DIP switch)

### LENS

Lens	2,8 ~ 12 mm
Lens type	Motorized
Focus mode	Synchronous automatic focus

### FUNCTIONS

Day/night	Auto (ICR)
OSD menu	Supported
Shutter	Electronic (auto)
White balance	Auto
Gain control	Auto
Backlight compensation	Digital WDR
Noise reduction	2D

### ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC
Working temperature	-10°C ~ +55°C
RH	<95% HR
Transmission distance	Up to 300 meters (theoretical) via 75-3 coaxial cable
Protection	IP66

### PHYSICAL FEATURES

Case	PVC & metal
Dimensions	Ø126,6 x 110,8 mm